


TEKS® TC100

Head Style	5/16 th AF HEX
Diameter	5.5mm (Buildex Screw size 12)
Effective Thread Length	90mm
Steel Thickness	1.2mm – 5.00mm
Total Length	100mm
Teks Drill Point	3
Thread Type	Spaced
Coating	Climaseal®
Box Quantity	50
Euro Code	920125

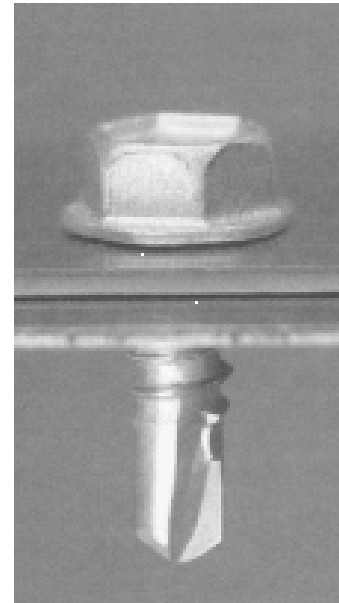

Recommended Pull Out values (Tensile)

STEEL THICKNESS MM							
1.20	1.50	2.00	2.50	3.00	4.00	5.00	6.00
0.80KN	1.11KN	1.56KN	2.39KN	2.88KN	3.34KN	4.30KN	*

Recommended Shear Values

STEEL THICKNESS MM							
1.20	1.50	2.00	2.50	3.00	4.00	5.00	6.00
2.00KN	2.38KN	2.89KN	2.91KN	2.91KN	2.91KN	2.91KN	*

Ultimate Fastener Values

Tensile	Shear (Average KN)	MIN Torque
12.63KN	9.09KN	0.42KN