


# TEKS® TL50

Head Style	5/16 <sup>th</sup> AF HEX
Diameter	5.5mm (Buildex Screw size 12)
Effective Thread Length	30mm
Steel Thickness	4mm – 12.5mm
Total Length	50mm
Teks Drill Point	5
Thread Type	Fine
Coating	Climaseal®

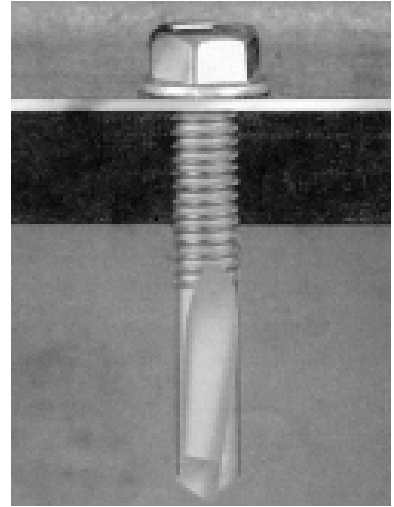

Box Quantity	200
Euro Code	920128

## Recommended Pull Out values (Tensile)

STEEL THICKNESS MM		
4mm	5mm	6mm -12.5mm
2.24KN	5.43KN	5.86KN

## Recommended Shear Values

STEEL THICKNESS MM		
4mm	5mm	6mm – 12.5mm
3.86KN	3.96KN	4.05KN

## Ultimate Fastener Values

Tensile	Shear (Average KN)	MIN Torque
14.49KN	10KN	0.68KN